

Technical Data Sheet

CODE 11144

MFO 90/3,5" T

Wall axial fans



Certifications



IMQ



CE



IMQ Performance



CCC




EAC

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,08 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 14 | Weight (Kg) | 0,575 |
| Frequency (Hz) | 50 | Delivery max (l/s) | 18 |
| Insulation Class | II° | Delivery max (m ³ /h) | 65 |
| IP | X4 | Pressure max (mmH ₂ O) | 2,5 |
| Max ambient temperature for continuous operation (°C) | 50 | Pressure max (Pa) | 25 |
| Nominal Diameter (mm) | 90 | RPM | 2540 |
| | | Sound Pressure level Lp [dB (A)] 3m | 29,6 |

DIMENSIONS



| | |
|----------------------|------|
| Etichetta Energetica | N0 |
| Size A (mm) | 158 |
| Size B (mm) | 37 |
| Size C (mm) | 97 |
| Size D (mm) | 92,4 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11144

MFO 90/3,5" T


Wall axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

CURVES

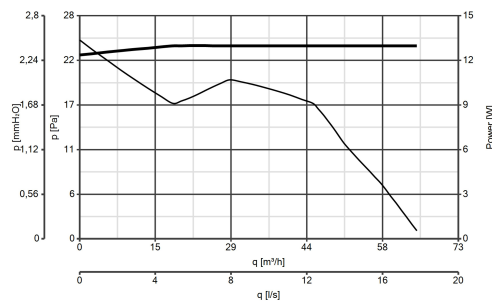

ACCESSORIES



SF 90-100

Code 22162

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com